

Michelin® XZE2™

An exceptional, regional, all-position radial with extra-wide, extra-deep tread designed to help deliver our best wear in high scrub applications



Michelin® XZE2™

An exceptional, regional, all-position radial with extra-wide, extra-deep tread designed to help deliver our best wear in high scrub applications

Matrix™ Siping technology helps prevent irregular wear and increase traction. The 3D Matrix sipes lock together for the stability normally associated with solid tread blocks.

Enhanced application specific compounds to promote resistance to aggressions and longer tread life.


Rib edge micro sipes helps protect against irregular wear.

Zig zag grooves help increase traction in new and worn tire conditions.

Full-width, elastic protector ply helps protect the working plies from bruising and penetrations.

Rectangular bead bundle – a Michelin exclusive – simulates a solid steel rod "strapping" the tire onto the wheel. This design stabilizes the entire bead region and minimizes fatigue in order to extend casing life.

Extra strong curb guards help protect sidewalls against most impacts and abrasions for long casing life.

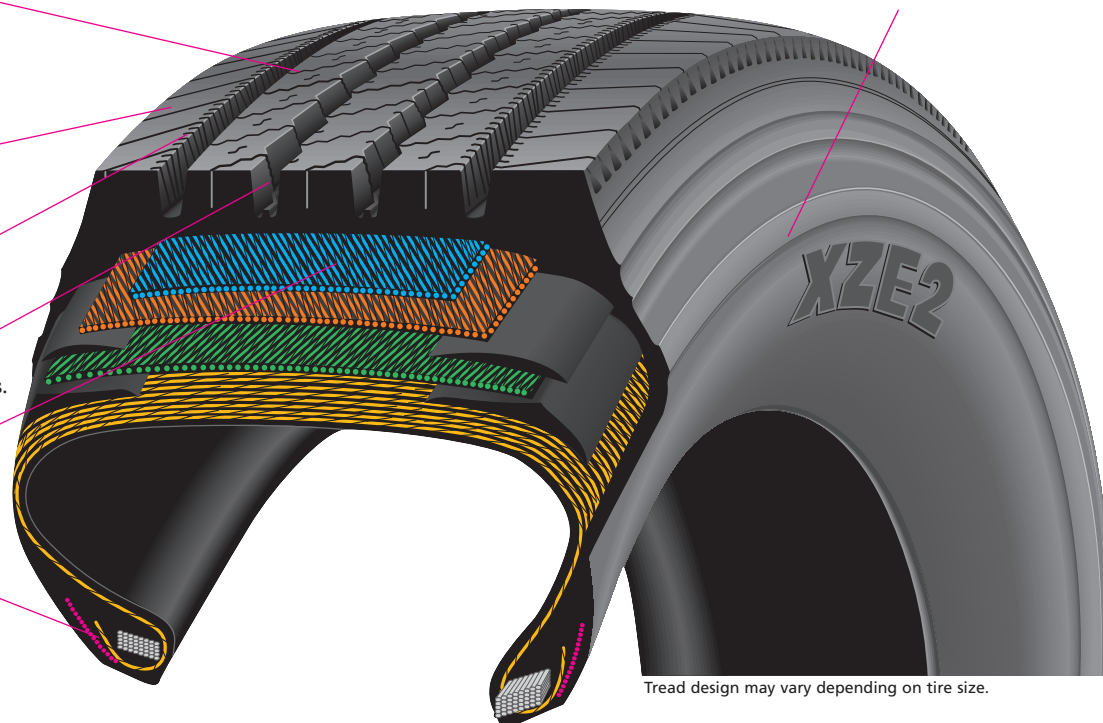

Tread design may vary depending on tire size.

Size	Load Range	Catalog Number	Tread Depth 32nds	Max. Speed (*) mph	Loaded Radius		Overall Diameter		Overall Width (†)		Approved Rims (Measuring rim listed first.)	Dual Spacing		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
					in.	mm	in.	mm	in.	mm		in.	mm		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
11R22.5	G	78390	22	75	19.2	488	41.3	1050	11.2	285	8.25, 7.50	12.5	318	502	6175	105	2800	720	5840	105	2650	720
11R22.5	H	67042	22	75	19.2	488	41.4	1051	11.3	286	8.25, 7.50	12.5	318	501	6610	120	3000	830	6005	120	2725	830
275/80R22.5	G	55895	22	75	18.6	473	40.2	1021	11.1	282	8.25, 7.50	12.2	311	517	6175	110	2800	760	5675	110	2575	760
275/80R22.5	H	55262	22	75	18.7	475	40.2	1022	11.1	282	8.25, 7.50	12.2	311	516	7160	120	3250	830	6610	120	3000	830
11R24.5	G	91867	22	75	20.3	516	43.5	1104	11.1	281	8.25, 7.50	12.5	318	476	6610	105	3000	720	6005	105	2725	720
11R24.5	H	88507	22	75	20.3	516	43.5	1104	11.1	281	8.25, 7.50	12.5	318	476	7160	120	3250	830	6610	120	3000	830
275/80R24.5	G	75519	22	75	19.3	490	41.3	1050	10.8	274	8.25, 7.50	12.2	311	501	6175	110	2800	760	5675	110	2575	760

† Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in rim width.

* Exceeding the lawful speed limit is neither recommended nor endorsed.

Michelin® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. Please consult rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without permission of component manufacturer.

www.michelintruck.com

United States

Michelin North America, Inc.
P.O. Box 19001, One Parkway South
Greenville, SC • 29602-9001
1-888-622-2306

Canada

Michelin North America (Canada), Inc.
3020 Avenue Jacques-Bureau
Laval, Quebec H7P 6G2
1-888-871-4444

Mexico

Industrias Michelin, S.A. de C.V.
Av. 5 de febrero No. 2113-A
Fracc. Industrial Benito Juárez
7 6120, Querétaro, Qro. Mexico
011 52 442 296 1600

Copyright ©2008 Michelin North America, Inc. All rights reserved. An Equal Opportunity Employer MWL43302 (01/08)

